


K-WV 5/3 PNEU ZENTRUM BELUEFTET 4A

5/3-way pilot valve, mid-position pressurised

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Operating pressure | 1.5 - 8 bar |
| Temp. range | Up to +70 °C |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| Control air port | G 1/8 |
| Valve body | Aluminium alloy |

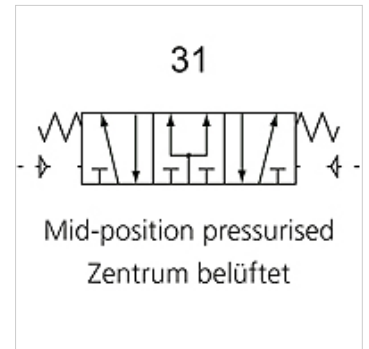

Note

Further information on request

Item

| Identification | Connection | Vent port | Flow rate (L/min) | circuit diagram number | Size |
|----------------|------------|-----------|-------------------|------------------------|------|
| K- 07 15 04 35 | M 5 | M 5 | 250 | 31 | 100 |
| K- 07 15 04 36 | G 1/8 | G 1/8 | 400 | 31 | 100 |
| K- 07 15 04 37 | G 1/8 | G 1/8 | 550 | 31 | 200 |
| K- 07 15 04 38 | G 1/4 | G 1/8 | 550 | 31 | 200 |
| K- 07 15 04 39 | G 1/4 | G 1/4 | 950 | 31 | 300 |
| K- 07 15 04 40 | G 3/8 | G 1/4 | 950 | 31 | 300 |
| K- 07 15 04 41 | G 1/2" | G 1/2 | 1600 | 31 | 400 |