


K-3/2 ANFAV 24 V DC HW G-MINI

Start-up valves, power supply 24 V DC, with »HW« mounting bracket and silencer

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Input pressure | 2.5 - 9 bar |
| Media temperature | max. 70 °C |
| Ambient temperature | Max. 70 °C |
| Electrical connection | Coupler plug PG 9 - form B |
| Sealant | NBR |
| Housing | Die-cast aluminium |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| More information | User manual on request |

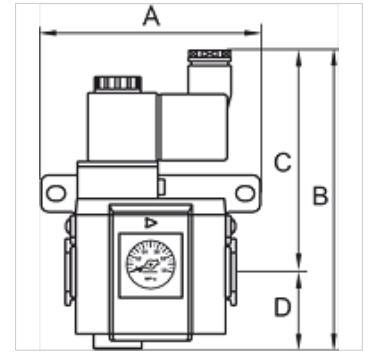

Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | Size |
|----------------|--------|-------------------|--------|----------|--------|--------|------|
| K- 07 25 12 26 | G 1/8 | 550 | 59,0 | 123.5 mm | 93,5 | 30,0 | 200 |
| K- 07 25 12 28 | G 1/4 | 550 | 59,0 | 123.5 mm | 93,5 | 30,0 | 200 |

Accessories

| | |
|-----------------|--------------|
| K-WANDHALTER | Wall bracket |
| K-HALTERBAUSATZ | Holder |

Accessory for following products

| | |
|-------------------|-----------|
| K-VT 2 ABGAENGE G | Manifolds |
|-------------------|-----------|