


# K-3/2 ANFAV 24 V DC HW G-MINI

Start-up valves, power supply 24 V DC, with »HW« mounting bracket and silencer

**HANSA FLEX**

## Properties

<b>Input pressure</b>	2.5 - 9 bar
<b>Media temperature</b>	max. 70 °C
<b>Ambient temperature</b>	Max. 70 °C
<b>Electrical connection</b>	Coupler plug PG 9 - form B
<b>Sealant</b>	NBR
<b>Housing</b>	Die-cast aluminium
<b>Flow rate measurement</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
<b>More information</b>	User manual on request

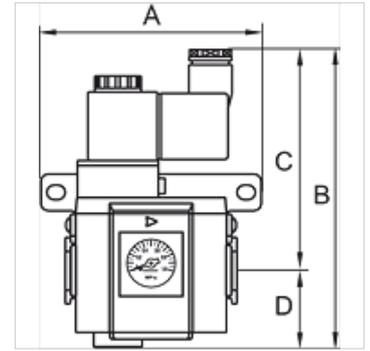

## Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	Size
K- 07 25 12 26	G 1/8	550	59,0	123.5 mm	93,5	30,0	200
K- 07 25 12 28	G 1/4	550	59,0	123.5 mm	93,5	30,0	200

## Accessories

K-WANDHALTER	Wall bracket
K-HALTERBAUSATZ	Holder

## Accessory for following products

K-VT 2 ABGAENGE G	Manifolds
-------------------	-----------