K-T-RED VERBINDER POM


Union tees, unequal

HANSA-FLEX

Properties

Working pressure	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Operating temperature	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material	Acetalpolymerisat (POM)
Sealant	NBR



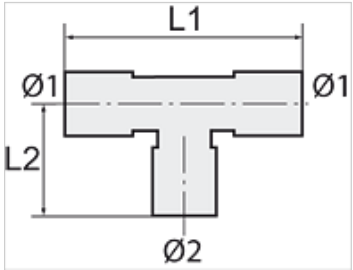

Note

Further information on request

Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Item

Identification	for hose external Ø1 (mm)	for hose external Ø2 (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.