


# K-STECKVERBINDU RED VA

Reducers

**HANSA FLEX**

## Properties

Working pressure pulsate	Max. 10 bar
Pressure	Max. 15 bar (depending on pipe quality)
Suitable pipe materials	PVDF, PTFE, stainless steel, PA, PU
Ambient temperature	-20 °C to max. +150 °C (depending on pipe quality and diameter)
Material	Stainless steel 1.4404
Sealant	FKM

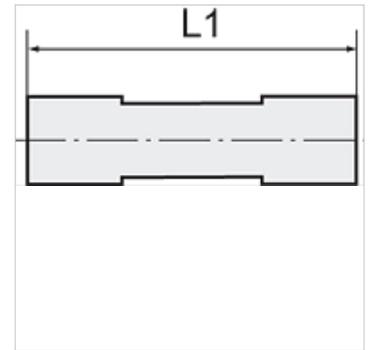

## Note

Further information on request

## Description

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Item

Identification	for external hose Ø	L1 (mm)
K- 07 40 46 78	6 mm / 4 mm	31,0
K- 07 40 46 79	8 mm / 6 mm	34,0