
K-BKR MINI VA IG AG

Mini ball valves, stainless steel, female / male thread

Properties

Operating pressure	max. 64 bar
Operating temperature	-20 °C to +120 °C
Seal	FKM (FPM)
Housing	Stainless steel 1.4401 (AISI 316)
Hand lever	Aluminium
Ball seals	PTFE
Spindle	Stainless steel 1.4401 (AISI 316)



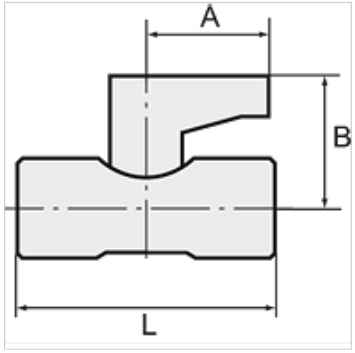

Note

Further information on request

Item

Identification	DN	Thread	A (mm)	B (mm)	L (mm)
K- 07 30 20 13	7	G 1/4	22,8	26,5	40,0
K- 07 30 20 14	7	G 3/8	22,8	26,5	42,0
K- 07 30 20 15	9	G 1/2	22,8	28,3	46,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.