

# K-BKR MINI VA AG

Mini ball valves, stainless steel, 2 x male thread

**HANSA FLEX**

## Properties

**Operating pressure** max. 64 bar

**Operating temperature** -20 °C to +120 °C


**Seal** FKM (FPM)

**Housing** Stainless steel 1.4401 (AISI 316)

**Hand lever** Aluminium

**Ball seals** PTFE

**Spindle** Stainless steel 1.4401 (AISI 316)

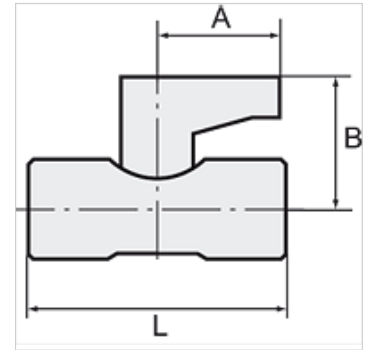

## Note

Further information on request

## Item

Identification	DN	Thread	A (mm)	B (mm)	L (mm)
K- 07 30 20 19	7	G 1/4	22,8	26,5	50,0
K- 07 30 20 20	7	G 3/8	22,8	26,5	50,0
K- 07 30 20 21	9	G 1/2	22,8	28,3	58,0