

# K-BKR MINI VA AG

Mini ball valves, stainless steel, 2 x male thread

**HANSA FLEX**

## Properties

**Operating pressure** max. 64 bar

**Operating temperature** -20 °C to +120 °C


**Seal** FKM (FPM)

**Housing** Stainless steel 1.4401 (AISI 316)

**Hand lever** Aluminium

**Ball seals** PTFE

**Spindle** Stainless steel 1.4401 (AISI 316)

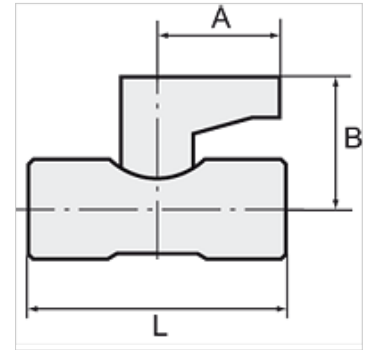

## Note

Further information on request

## Item

| Identification | DN | Thread | A<br>(mm) | B<br>(mm) | L<br>(mm) |
|----------------|----|--------|-----------|-----------|-----------|
| K- 07 30 20 19 | 7  | G 1/4  | 22,8      | 26,5      | 50,0      |
| K- 07 30 20 20 | 7  | G 3/8  | 22,8      | 26,5      | 50,0      |
| K- 07 30 20 21 | 9  | G 1/2  | 22,8      | 28,3      | 58,0      |