
# K-BKR MINI VA AG

Mini ball valves, stainless steel, 2 x male thread

## Properties

| | |
|---|---|
| **Operating pressure** | max. 64 bar |
| **Operating temperature** | -20 °C to +120 °C |
| **Seal** | FKM (FPM) |
| **Housing** | Stainless steel 1.4401 (AISI 316) |
| **Hand lever** | Aluminium |
| **Ball seals** | PTFE |
| **Spindle** | Stainless steel 1.4401 (AISI 316) |

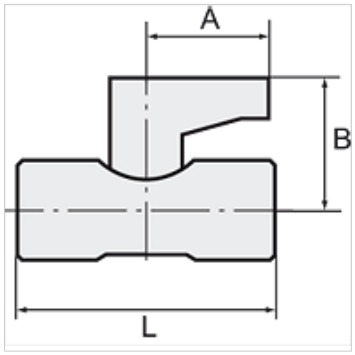


## Note

Further information on request

## Item

| Identification | DN | Thread | A (mm) | B (mm) | L (mm) |
|---|---|---|---|---|---|
| **K- 07 30 20 19** | 7 | G 1/4 | 22,8 | 26,5 | 50,0 |
| **K- 07 30 20 20** | 7 | G 3/8 | 22,8 | 26,5 | 50,0 |
| **K- 07 30 20 21** | 9 | G 1/2 | 22,8 | 28,3 | 58,0 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*