# K-WTEH 2-TLG PC SCHU WAND V G


Service units, 2-piece with polycarbonate bowl, bowl guard and joiner for wall mounting, fully-automatic drain valve

HANSA FLEX

## Properties

| | |
|---|---|
| **Input pressure** | Max. 10 bar |
| **Media temperature** | max. 70 °C |
| **Ambient temperature** | Max. 70 °C |
| **Pore size in filter element** | 5 µm |
| **Sealant** | NBR |
| **Spring bonnet** | POM |
| **Housing** | Die-cast aluminium |
| **Dropper** | Brass/POM |
| **Drain valve** | Semi- or fully-automatic |
| **Flow rate measurement** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| **More information** | User manual on request |



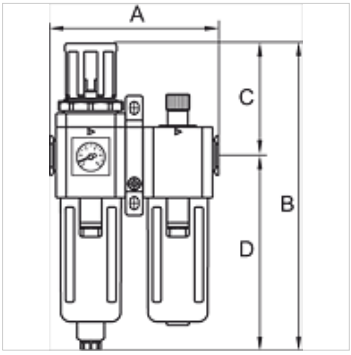


## Item

| Identification | Thread | Control range | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | Size |
|---|---|---|---|---|---|---|---|---|
| **K- 07 25 13 96** | G 1/4 | 1.5 - 9 bar | 1050 | 115,0 | 225.5 mm | 82,5 | 143,0 | 300 |
| **K- 07 25 13 98** | G 3/8 | 1.5 - 9 bar | 1350 | 115,0 | 225.5 mm | 82,5 | 143,0 | 300 |
| **K- 07 25 14 00** | G 1/2 | 1.5 - 9 bar | 1350 | 115,0 | 225.5 mm | 82,5 | 143,0 | 300 |
| **K- 07 25 14 02** | G 3/8 | 1.5 - 9 bar | 3100 | 152,0 | 270.5 mm | 104,0 | 166,5 | 400 |
| **K- 07 25 14 04** | G 1/2 | 1.5 - 9 bar | 3100 | 152,0 | 270.5 mm | 104,0 | 166,5 | 400 |

## Accessories

| | |
|---|---|
| **K-VERSCHLEI-SATZ** | Set of wearing parts |
| **K-ERSATZMEMBRANE** | Replacement diaphragm |
| **K-ADAPTERPLATTEN HANSA** | Adapter plate HANSA |
| **K-SCHUTZKORB G** | Protective cage |
| **K-FILTERELEMENT** | Filter element |
| **K-ERSATZBEHAELTER G UND G-MINI POLY** | Spare tanks »G« Series and »G-mini« Series Polycarbonat |
| **K-VERBINDUNGELEMENTE** | Connecting sets |
| **K-WANDHALTER** | Wall bracket |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*