


K-DRV 2

Unidirectional flow control valves



Properties	
Operating pressure	Max. 10 bar
Operating temperature	0 °C to +150 °C
Sealant	FKM
Housing	Stainless steel 1.4404
Internal parts	Stainless steel 1.4404

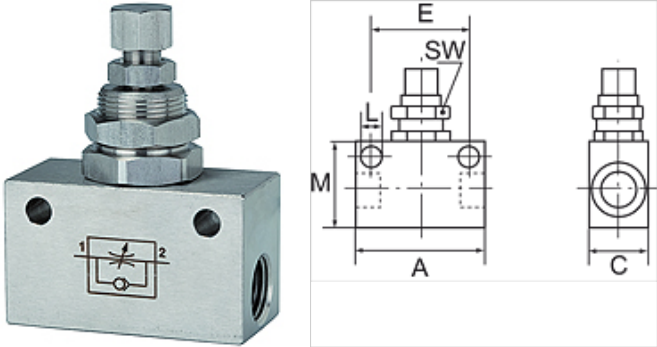

Note
Further information on request

Description
Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

Item							
Identification	Thread	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	AF (mm)
K- 07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22