

K-DRV 2

Unidirectional flow control valves

Properties



Operating pressure Max. 10 bar

Operating temperature 0 °C to +150 °C

Sealant FKM

Housing Stainless steel 1.4404

Internal parts Stainless steel 1.4404

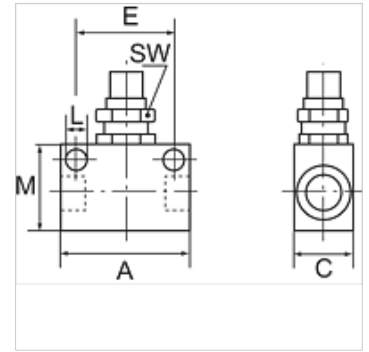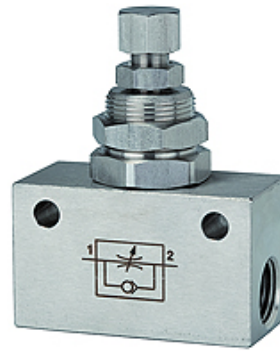

Note

Further information on request

Description

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

Item

Identification	Thread	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	AF (mm)
K- 07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22