


Properties

Operating pressure	Max. 10 bar
Operating temperature	0 °C to +150 °C
Sealant	FKM
Housing	Stainless steel 1.4404
Internal parts	Stainless steel 1.4404

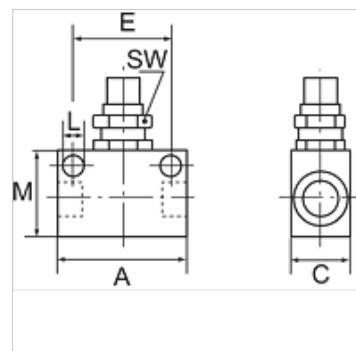

Note

Further information on request

Description

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

Item

Identification	Thread	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	AF (mm)
K-07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K-07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22