


K-L-AGR-K OR DRH VA

Male run tees, conical male thread acc. to ISO 7-1, stainless steel

HANSA FLEX

Properties

| | |
|--------------------------|--|
| Pressure range | Max. 25 bar |
| Recommended hoses | PTFE hose |
| Temp. range | -40 °C to +200 °C (depending on the hose quality and diameter) |
| Material | Stainless steel 1.4404 |
| Seal | Pure metal |

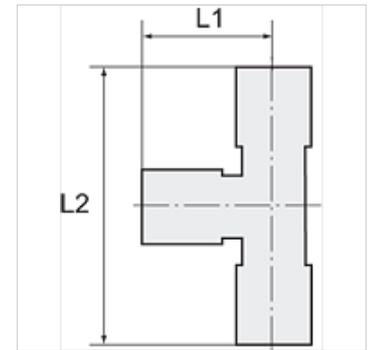

Note

Further information on request

Description

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

Item

| Identification | Thread | for hose | L1 (mm) | L2 (mm) | AF1 (mm) | AF2 (mm) |
|----------------|--------|--------------|------------|------------|-------------|-------------|
| K- 07 40 30 51 | R 1/8 | 6 mm / 4 mm | 23,0 | 40,0 | 12 | 10 |
| K- 07 40 30 52 | R 1/8 | 8 mm / 6 mm | 23,0 | 40,0 | 14 | 10 |
| K- 07 40 30 49 | R 1/4 | 6 mm / 4 mm | 23,0 | 44,5 | 12 | 10 |
| K- 07 40 30 50 | R 1/4 | 8 mm / 6 mm | 23,0 | 44,5 | 14 | 10 |
| K- 07 40 30 48 | R 1/4 | 10 mm / 8 mm | 26,0 | 47,5 | 16 | 12 |