# K-T-STUECKE IG VA

Tees, female/female/female, stainless steel

## Properties

| | |
|---|---|
| **Operating temperature** | -20 °C to +150 °C |
| **Pressure range** | Max. 150 bar |
| **Female thread** | Parallel to DIN EN ISO 228-1 |
| **Material** | Stainless steel 1.4404 |
| **Male thread** | conical acc. DIN 2999 |



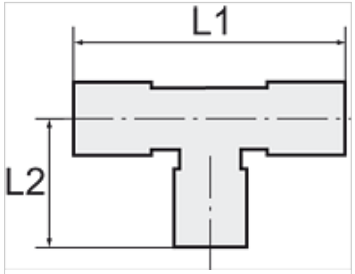


## Note

Further information on request

## Item

| Identification | Thread | L1 (mm) | L2 (mm) |
|---|---|---|---|
| **K- 07 40 10 72** | G 1/8 | 38,0 | 19,0 |
| **K- 07 40 10 73** | G 1/4 | 46,0 | 23,0 |
| **K- 07 40 10 74** | G 3/8 | 51,0 | 25,5 |
| **K- 07 40 10 75** | G 1/2 | 64,0 | 32,0 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*