


K-BKR GELB STAHLHEBEL IG IG

Ball valves with yellow steel lever, lightweight type, female/female thread

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Application | Compressed air, water, non-toxic and non-corrosive gases, heating systems, agriculture |
| Operating pressure | Max. 40 bar |
| Operating temperature | -15 °C to +90 °C |
| Thread description | G thread acc. DIN EN ISO 228-1 |
| Housing | Nickel-plated brass |
| Lever | Steel, with plastic coating |
| Ball | Chrome-plated brass |
| Ball seals | PTFE |
| Stem seal | HNBR / EPDM / PTFE. 2 O-Rings (HNBR / EPDM) 1 gasket (PTFE) additional PTFE-gasket |

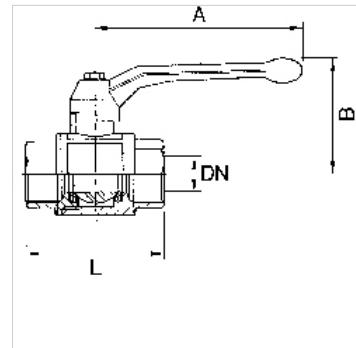

Note

Further information on request

Item

| Identification | DN | Thread | A (mm) | B (mm) | L (mm) |
|----------------|----|---------|-----------|-----------|-----------|
| K-07 30 00 81 | 8 | G 1/4 | 85,0 | 42,0 | 39,0 |
| K-07 30 00 85 | 10 | G 3/8 | 85,0 | 42,0 | 43,0 |
| K-07 30 00 89 | 15 | G 1/2 | 85,0 | 46,0 | 50,0 |
| K-07 30 00 93 | 20 | G 3/4 | 105,0 | 53,0 | 58,0 |
| K-07 30 00 97 | 25 | G 1 | 105,0 | 57,0 | 69,0 |
| K-07 30 01 01 | 32 | G 1 1/4 | 130,0 | 70,0 | 81,0 |
| K-07 30 01 05 | 40 | G 1 1/2 | 130,0 | 76,0 | 93,0 |
| K-07 30 01 09 | 50 | G 2 | 165,0 | 92,0 | 110,0 |