
K-BKR GELB STAHLHEBEL IG IG

Ball valves with yellow steel lever, lighweight type, female/female thread



-				
Properties				
Application	Compressed air, water, non-toxic and non- corrosive gases, heating systems, agriculture			
Operating pressure	Max. 40 bar			
Operating temperature	-15 °C to +90 °C			
Thread description	G thread acc. DIN EN ISO 228-1			
Housing	Nickel-plated brass			
Lever	Steel, with plastic coating			
Ball	Chrome-plated brass			
Ball seals	PTFE			
Stem seal	HNBR / EPDM / PTFE. 2 O-Rings (HNBR / EPDM) 1 gasket (PTFE) additional PTFE-gasket			

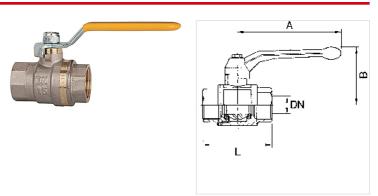

Note

Further information on request

Item						
Identification	DN	Thread	A (mm)	B (mm)	L (mm)	
K- 07 30 00 81	8	G 1/4	85,0	42,0	39,0	
K- 07 30 00 85	10	G 3/8	85,0	42,0	43,0	
K- 07 30 00 89	15	G 1/2	85,0	46,0	50,0	
K- 07 30 00 93	20	G 3/4	105,0	53,0	58,0	
K- 07 30 00 97	25	G 1	105,0	57,0	69,0	
K- 07 30 01 01	32	G 1 1/4	130,0	70,0	81,0	
K- 07 30 01 05	40	G 1 1/2	130,0	76,0	93,0	
K- 07 30 01 09	50	G 2	165.0	92.0	110.0	