


# K-3 BKR T VA LEICHT

## 3-way ball valves, T-bore, lightweight type

### Properties

<b>Thread description</b>	Rp thread acc. to ISO 7-1
<b>Media temperature</b>	-15 °C to max. +100 °C
<b>Sealant</b>	PTFE
<b>Spring</b>	Stainless-steel
<b>Housing and ball</b>	Nickel-plated brass
<b>Hand lever</b>	Aluminium, painted black

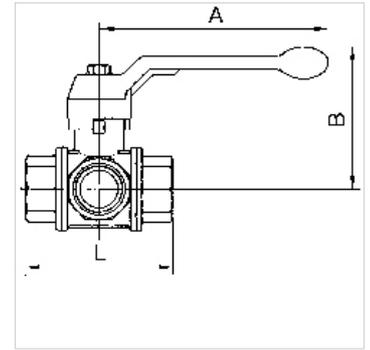

### Note

Further information on request

### Description

Sealing on all sides with T-bore. In contrast to the 1084 series, the lever of this model can only be turned 90° rather than 180°. Only two valve positions are therefore possible instead of four.

### Item

Identification	DN	Thread	A (mm)	B (mm)	Bore inball	L (mm)	max. working pressure at 20° C (bar)
K- 07 30 19 68	15	Rp 1/2	130,0	85,0	13	80,0	40
K- 07 30 19 69	20	Rp 3/4	160,0	98,0	18	96,0	40
K- 07 30 19 70	25	Rp 1	160,0	102,0	23	113,0	25
K- 07 30 19 71	32	Rp 1 1/4	195,0	121,0	29	130,0	16
K- 07 30 19 72	40	Rp 1 1/2	195,0	125,0	35	147,0	16
K- 07 30 19 73	50	Rp 2	235,0	141,0	44	169,0	16