


K-PRAEZIONS STEUERREGLER

Precision pilot regulators (feedback)



| Properties | |
|--------------------------|-----------------------|
| Input pressure | Max. 16 bar |
| Media temperature | max. 80 °C |
| Ambient temperature | Max. 80 °C |
| Port for pressure gauge | For feedback pressure |
| Sealant | FKM |
| Housing | Die-cast zinc |
| Diaphragm | FKM |
| Internal air consumption | 3 to 6 l/min |

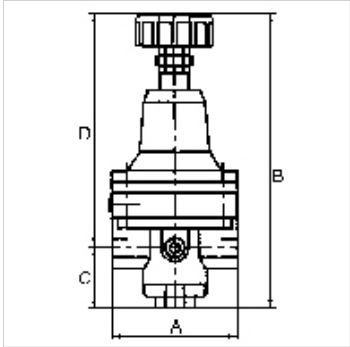

Note

Further information on request

Description

Diaphragm pressure regulator for feedback systems, specially designed for use in a pneumatically controlled closed control loop in combination with a pressure regulator with pneumatic remote control, e.g. our Art. Nos. K-07250505 to K-07250510.

| Item | | | | | | |
|----------------|--------|---------------|-----------|----------|-----------|-----------|
| Identification | Thread | Control range | A (mm) | B | C (mm) | D (mm) |
| K- 07 25 05 11 | G 1/4 | 0.2 - 7 bar | 82,0 | 142.8 mm | 19,4 | 123,4 |

Accessories

| | |
|--------------------------|--------|
| K-HALTERBAUSATZ STANDARD | Holder |
|--------------------------|--------|