
K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

Properties

Media	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Working pressure	Max. 10 bar
Set pressure	0,6 bar (Ø 20 bis Ø 32), 0,4 bar (Ø 40 bis Ø 100)
Temp. range	-10 °C to +60 °C (Ø 20 to Ø 63) -10 °C to +80 °C (Ø 80 bis Ø 100)
Piston rod	C45 steel, hard chrome-plated
Pipe	Anodised aluminium jacket with T-slots
Piston	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 100)
Sealant	NBR



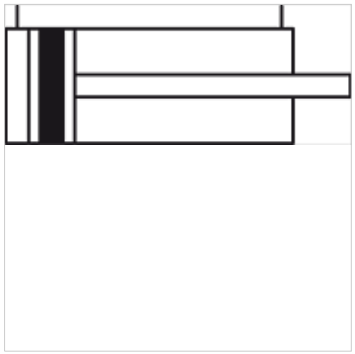

Note

Further information on request

Description

New series acc. to ISO 21287 characterised by a very short and compact design. The standard type features a magnetic piston. Piston rod optionally with male or female thread.

Item

Identification	Ø piston	Stroke (mm)	Connection	Piston rod thread
K- 07 15 08 09	20 mm	5	M 5	M 8
K- 07 15 08 10	20 mm	10	M 5	M 8
K- 07 15 08 11	20 mm	15	M 5	M 8
K- 07 15 08 12	20 mm	20	M 5	M 8
K- 07 15 08 13	20 mm	25	M 5	M 8
K- 07 15 08 14	20 mm	30	M 5	M 8
K- 07 15 08 15	20 mm	40	M 5	M 8
K- 07 15 08 16	20 mm	50	M 5	M 8
K- 07 15 08 17	20 mm	60	M 5	M 8
K- 07 15 08 18	25 mm	5	M 5	M 8
K- 07 15 08 19	25 mm	10	M 5	M 8
K- 07 15 08 20	25 mm	15	M 5	M 8
K- 07 15 08 21	25 mm	20	M 5	M 8
K- 07 15 08 22	25 mm	25	M 5	M 8
K- 07 15 08 23	25 mm	30	M 5	M 8
K- 07 15 08 24	25 mm	40	M 5	M 8
K- 07 15 08 25	25 mm	50	M 5	M 8
K- 07 15 08 26	25 mm	60	M 5	M 8
K- 07 15 08 27	32 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 28	32 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 29	32 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 30	32 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 31	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 32	32 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 33	32 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 34	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 35	32 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 36	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 37	40 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 38	40 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 39	40 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 40	40 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 41	40 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 42	40 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 43	40 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 44	40 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 45	40 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 46	40 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 47	50 mm	5	G 1/8	M 12 x 1.25

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Connection	Piston rod thread
K- 07 15 08 48	50 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 49	50 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 50	50 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 51	50 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 52	50 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 53	50 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 54	50 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 55	50 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 56	50 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 57	63 mm	5	G 1/8	M 12 x 1.25
K- 07 15 08 58	63 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 59	63 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 60	63 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 61	63 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 62	63 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 63	63 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 64	63 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 65	63 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 66	63 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 67	80 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 68	80 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 69	80 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 70	80 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 71	80 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 72	80 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 73	80 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 74	80 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 75	80 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 76	80 mm	80	G 1/8	M 16 x 1.5
K- 07 15 07 99	100 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 00	100 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 01	100 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 02	100 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 03	100 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 04	100 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 05	100 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 06	100 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 07	100 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 08	100 mm	80	G 1/8	M 16 x 1.5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.