


K-MV G (NC) D 230 V, 50 HZ H

Normally closed, (NC), directly operated, 230 V, 50 Hz, for high pressures

HANSA FLEX

Properties

Electrical connection	device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket
Protection IP	IP 65
Media temperature	max. 80 °C when using water or oils; max. 90 °C when using with air
Thread description	G thread acc. DIN EN ISO 228-1
Housing, valve seat	Brass
Internal parts	Stainless steel
Seal	FPM

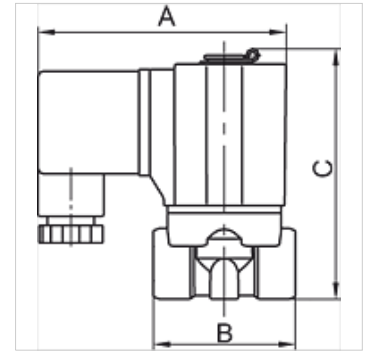

Note

Further information on request

Description

Standard series in two different versions: Directly operated, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Item

Identification	Thread	Max. working pressure (bar)	DN	A (mm)	B (mm)	C (mm)	Type
K- 07 30 01 60	G 1/8	30	1,5	70,0	40,0	70,7	1
K- 07 30 01 61	G 1/4	30	1,5	70,0	40,0	70,7	1
K- 07 30 01 62	G 3/8	30	3,0	85,0	52,0	87,0	1
K- 07 30 01 63	G 1/2	30	3,0	85,0	52,0	87,0	1