


# K-SCHL-AUFROLLER LU WA S

Hose reels for compressed air and water, heavy-duty type

**HANSA FLEX**

## Properties

<b>Hose material</b>	Polyurethane
<b>Operating pressure</b>	Max. 10 bar
<b>Operating temperature</b>	-10 °C to +40 °C
<b>Mounting</b>	Wall, floor or ceiling
<b>Inlet</b>	Hose stem 8 mm

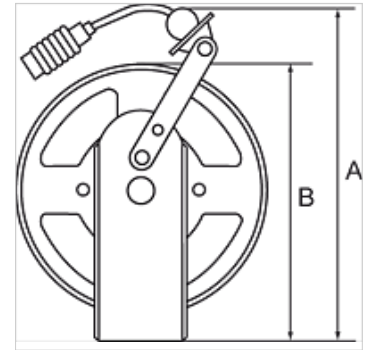

## Note

Further information on request

## Description

Heavy-duty steel design for industrial applications. Blue, powder-coated housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

## Item

Identification	Hose size	A (mm)	B (mm)	Hose length (m)
K- 07 10 06 24	10 mm x 6,5 mm	420,0	353,0	10
K- 07 10 06 25	10 mm x 6,5 mm	420,0	353,0	20
K- 07 10 06 26	12 mm x 8 mm	420,0	353,0	15
K- 07 10 06 27	16 mm x 11 mm	420,0	353,0	15