


K-DRUCKLUFTBEHAELTER

Compressed air tanks

HANSA***FLEX***

Properties

Operating pressure	max. 11 bar
Temp. range	-10 °C to +60 °C
Material	steel (FeP04), plastic coated

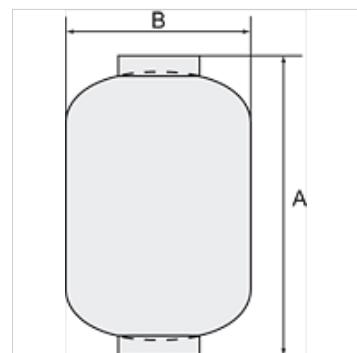

Note

Further information on request

Description

Compact steel tanks in accordance with EU Directive 97/23

Item	Identification	Contents (L)	Connection	A (mm)	B
	K-07 25 17 94	1,0	2 x G 1/2 female	225,0	85,0 mm
	K-07 25 17 95	2,5	2 x G 1/2 female	170,0	160,0 mm
	K-07 25 17 96	5,0	2 x G 1/2 female	184,0	210,0 mm
	K-07 25 17 97	7,0	2 x G 1/2 female	240,0	210,0 mm
	K-07 25 17 98	12,0	2 x G 1/2 female	365,0	229,0 mm