
K-WV 5/2 MONOSTABIL 4A

5/2-way pilot valve, monostable

Properties

Operating pressure	1.5 - 8 bar
Temp. range	Up to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Control air port	G 1/8
Valve body	Aluminium alloy



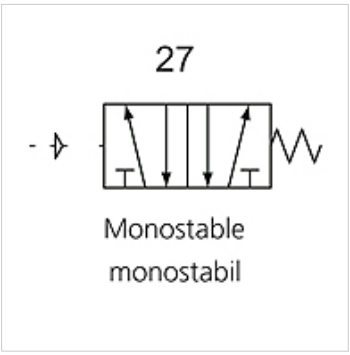

Note

Further information on request

Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Control	Size
K- 07 15 03 16	M 5	M 5	300	27		100
K- 07 15 03 17	G 1/8	G 1/8	500	27		100
K- 07 15 03 18	G 1/8	G 1/8	750	27		200
K- 07 15 03 19	G 1/4	G 1/8	850	27		200
K- 07 15 03 20	G 1/4	G 1/4	1300	27		300
K- 07 15 03 21	G 3/8	G 1/4	1500	27		300
K- 07 15 03 22	G 1/2"	G 1/2	2000	27		400

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.