
K-WV 5/2 BISTABIL 4A

5/2-way pilot valve, bistable

Properties

Operating pressure	1.5 - 8 bar
Temp. range	Up to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Control air port	G 1/8
Valve body	Aluminium alloy



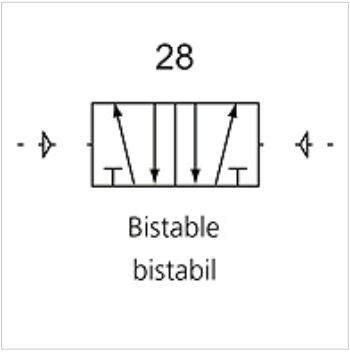

Note

Further information on request

Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Control	Size
K- 07 15 03 23	M 5	M 5	300	28		100
K- 07 15 03 24	G 1/8	G 1/8	500	28		100
K- 07 15 03 25	G 1/8	G 1/8	750	28		200
K- 07 15 03 26	G 1/4	G 1/8	850	28		200
K- 07 15 03 27	G 1/4	G 1/4	1300	28		300
K- 07 15 03 28	G 3/8	G 1/4	1500	28		300
K- 07 15 03 29	G 1/2"	G 1/2	2000	28		400

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.