


# K-WV 3/2 ELEKTROPNEU MONO OFFEN 3V

3/2-way pilot valve, monostable, normally open (NO)

**HANSA FLEX**

## Properties

Operating pressure	1.5 - 8 bar
Temp. range	-20 °C to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
Electrical connection	Connector Type B acc. to ISO 4400
min. working pressure	1,5 bar
Protection IP	IP 65
Valve body	Aluminium alloy

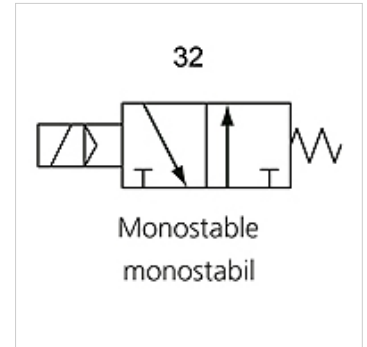

## Note

Further information on request

## Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Voltage	Control	Size
K- 07 15 01 00	M 5	M 5	300	32	24 V DC		100
K- 07 15 01 01	G 1/8	G 1/8	500	32	24 V DC		100
K- 07 15 01 02	G 1/8	G 1/8	750	32	24 V DC		200
K- 07 15 01 03	G 1/4	G 1/4	850	32	24 V DC		200
K- 07 15 01 04	G 1/4	G 1/4	1300	32	24 V DC		300
K- 07 15 01 05	G 3/8	G 3/8	1500	32	24 V DC		300
K- 07 15 01 06	M 5	M 5	300	32	230 V, 50 Hz		100
K- 07 15 01 07	G 1/8	G 1/8	500	32	230 V, 50 Hz		100
K- 07 15 01 08	G 1/8	G 1/8	750	32	230 V, 50 Hz		200
K- 07 15 01 09	G 1/4	G 1/4	850	32	230 V, 50 Hz		200
K- 07 15 01 10	G 1/4	G 1/4	1300	32	230 V, 50 Hz		300
K- 07 15 01 11	G 3/8	G 3/8	1500	32	230 V, 50 Hz		300