


K-WV 3/2 ELEKTROPNEU MONO OFFEN 3V

3/2-way pilot valve, monostable, normally open (NO)

HANSA FLEX

Properties

| | |
|------------------------------|--|
| Operating pressure | 1.5 - 8 bar |
| Temp. range | -20 °C to +70 °C |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| Electrical connection | Connector Type B acc. to ISO 4400 |
| min. working pressure | 1,5 bar |
| Protection IP | IP 65 |
| Valve body | Aluminium alloy |

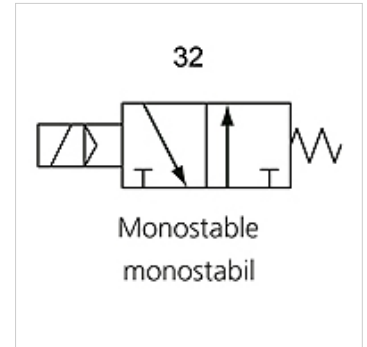

Note

Further information on request

Item

| Identification | Connection | Vent port | Flow rate (L/min) | circuit diagram number | Voltage | Control | Size |
|----------------|------------|-----------|-------------------|------------------------|--------------|---------|------|
| K- 07 15 01 00 | M 5 | M 5 | 300 | 32 | 24 V DC | | 100 |
| K- 07 15 01 01 | G 1/8 | G 1/8 | 500 | 32 | 24 V DC | | 100 |
| K- 07 15 01 02 | G 1/8 | G 1/8 | 750 | 32 | 24 V DC | | 200 |
| K- 07 15 01 03 | G 1/4 | G 1/4 | 850 | 32 | 24 V DC | | 200 |
| K- 07 15 01 04 | G 1/4 | G 1/4 | 1300 | 32 | 24 V DC | | 300 |
| K- 07 15 01 05 | G 3/8 | G 3/8 | 1500 | 32 | 24 V DC | | 300 |
| K- 07 15 01 06 | M 5 | M 5 | 300 | 32 | 230 V, 50 Hz | | 100 |
| K- 07 15 01 07 | G 1/8 | G 1/8 | 500 | 32 | 230 V, 50 Hz | | 100 |
| K- 07 15 01 08 | G 1/8 | G 1/8 | 750 | 32 | 230 V, 50 Hz | | 200 |
| K- 07 15 01 09 | G 1/4 | G 1/4 | 850 | 32 | 230 V, 50 Hz | | 200 |
| K- 07 15 01 10 | G 1/4 | G 1/4 | 1300 | 32 | 230 V, 50 Hz | | 300 |
| K- 07 15 01 11 | G 3/8 | G 3/8 | 1500 | 32 | 230 V, 50 Hz | | 300 |