
K-WV 3/2 ELEKTROPNEU BISTABIL 3V

3/2-way pilot valve, bistable

Properties

Operating pressure	1.5 - 8 bar
Temp. range	-20 °C to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Electrical connection	Connector Type B acc. to ISO 4400
min. working pressure	1,5 bar
Protection IP	IP 65
Valve body	Aluminium alloy



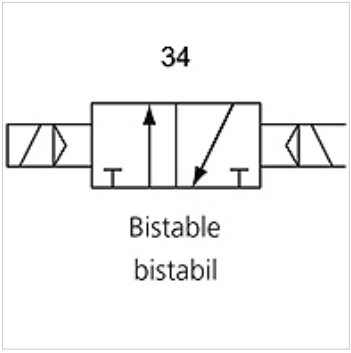

Note

Further information on request

Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Voltage	Control	Size
K- 07 15 01 24	M 5	M 5	300	34	24 V DC		100
K- 07 15 01 25	G 1/8	G 1/8	500	34	24 V DC		100
K- 07 15 01 26	G 1/8	G 1/8	750	34	24 V DC		200
K- 07 15 01 27	G 1/4	G 1/4	850	34	24 V DC		200
K- 07 15 01 28	G 1/4	G 1/4	1300	34	24 V DC		300
K- 07 15 01 29	G 3/8	G 3/8	1500	34	24 V DC		300
K- 07 15 01 30	M 5	M 5	300	34	230 V, 50 Hz		100
K- 07 15 01 31	G 1/8	G 1/8	500	34	230 V, 50 Hz		100
K- 07 15 01 32	G 1/8	G 1/8	750	34	230 V, 50 Hz		200
K- 07 15 01 33	G 1/4	G 1/4	850	34	230 V, 50 Hz		200
K- 07 15 01 34	G 1/4	G 1/4	1300	34	230 V, 50 Hz		300
K- 07 15 01 35	G 3/8	G 3/8	1500	34	230 V, 50 Hz		300

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.