K-3/2 ABSPERRVENTILE HW SCHL G


3/2-way shut-off valve

HANSA-FLEX

Properties

Input pressure	0 - 9 bar
Media temperature	max. 70 °C
Ambient temperature	Max. 70 °C
Vent port	G 3/8 (K-07251214, K-07251215, K-07251216), \nG 1/2 (K-07251217, K-07251218)
Sealant	NBR
Housing	Die-cast-Aluminium
Toggle	Plastic
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
More information	User manual on request



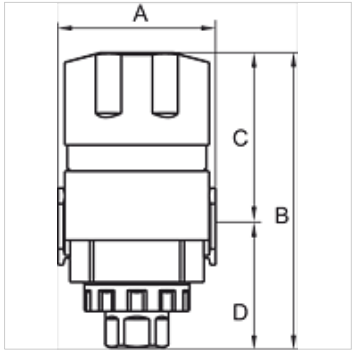

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	Size
K- 07 25 12 14	G 1/4	1600	51,0	112.5 mm	66,5	46,0	300
K- 07 25 12 15	G 3/8	2500	51,0	112.5 mm	66,5	46,0	300
K- 07 25 12 16	G 1/2	2500	51,0	112.5 mm	66,5	46,0	300
K- 07 25 12 17	G 3/8	6200	63,0	134.0 mm	75,5	58,5	400
K- 07 25 12 18	G 1/2	6200	63,0	134.0 mm	75,5	58,5	400

Accessories

K-VERBINDUNGELEMENTE	Connecting sets
K-WANDHALTER	Wall bracket
K-HALTERBAUSATZ	Holder

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.