

K-STECKVERBINDU ABSP

Stop unions

HANSA FLEX

Properties

Working pressure Max. 10 bar, vacuum

Application Air, vacuum

Recommended hoses PU or PA (nylon)


Media Compressed air

Temp. range 0 °C to +60 °C

Sealing surface O-ring (NBR)

Material Plastic, Nickel plated brass

Contact pressure ring Plastic

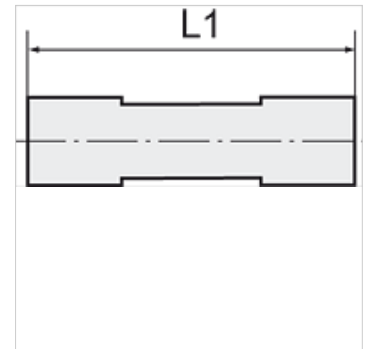

Note

Further information on request

Description

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

Item

Identification	for external hose Ø	L1 (mm)
K- 07 40 08 59	4 mm	47,0
K- 07 40 08 60	6 mm	45,0
K- 07 40 08 61	8 mm	49,5
K- 07 40 08 62	10 mm	63,0
K- 07 40 08 63	12 mm	66,5