
K-STECKNIPPEL RED

push-in plugs, unequal



Properties		
Working pressure	Max. 15 bar, coarse vacuum	
Application	Air, vacuum	
Recommended hoses	PU or PA (nylon)	
Media	Compressed air and all gases or liquids that are compatible with the materials	
Temp. range	-20 °C to +80 °C	
Sealing surface	Parallel version: O-ring in housing, Conical version: thread coating	
Material	Plastic, Nickel plated brass	
Contact pressure ring	Plastic	

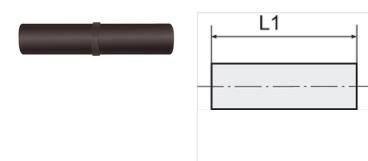

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Item		
Identification	for external hose Ø	L1 (mm)
K- 07 40 42 83	6 mm / 4 mm	37,5
K- 07 40 42 84	8 mm / 4 mm	40,5
K- 07 40 42 85	8 mm / 6 mm	42,5
K- 07 40 42 86	10 mm / 6 mm	44,5
K- 07 40 42 87	10 mm / 8 mm	47,0
K- 07 40 42 88	12 mm / 8 mm	49,5
K- 07 40 42 89	12 mm / 10 mm	51.0