


K-WV 5/2 HANDHEBEL RASTEND 4H

5/2-way valve, operated by hand lever, latching

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Operating pressure | 0 - 8 bar |
| Temp. range | -20 °C to +70 °C |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| Valve body | Aluminium alloy |

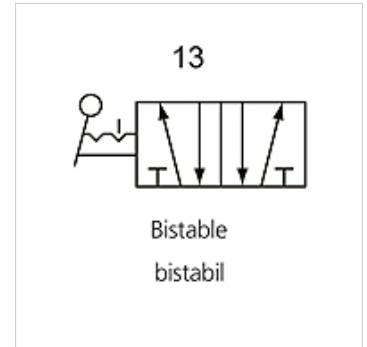

Note

Further information on request

Item

| Identification | Output | Input | Vent port | Flow rate (L/min) | circuit diagram number | Size |
|----------------|--------|-------|-----------|-------------------|------------------------|------|
| K- 07 15 02 75 | G 1/8 | G 1/8 | G 1/8 | 750 | 13 | 200 |
| K- 07 15 02 76 | G 1/4 | G 1/4 | G 1/8 | 850 | 13 | 200 |
| K- 07 15 02 77 | G 1/4 | G 1/4 | G 1/4 | 1300 | 13 | 300 |
| K- 07 15 02 78 | G 3/8 | G 3/8 | G 1/4 | 1500 | 13 | 300 |