


K-WTEH 3-TLG PC-BEHÄLTER S W H G-MINI

Service units, 3-piece with polycarbonate bowl, bowl guard and joiner for wall mounting, semi-automatic drain valve

HANSA FLEX

Properties

| | |
|------------------------------------|--|
| Input pressure | Max. 10 bar |
| Media temperature | max. 70 °C |
| Ambient temperature | Max. 70 °C |
| Pore size in filter element | 5 µm |
| Sealant | NBR |
| Spring bonnet | POM |
| Housing | Die-cast aluminium |
| Dropper | Brass/POM |
| Drain valve | Semi-automatic |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| More information | User manual on request |

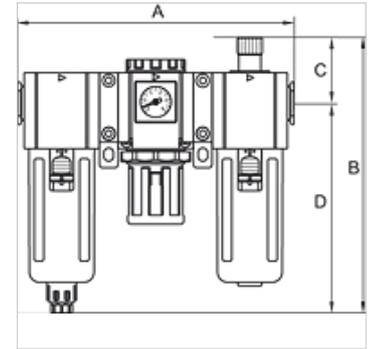

Item

| Identification | Thread | Control range | Flow rate (L/min) | A (mm) | B (mm) | C (mm) | D (mm) | Size |
|----------------|--------|---------------|-------------------|--------|----------|--------|--------|------|
| K- 07 25 14 35 | G 1/8 | 1.5 - 9 bar | 500 | 138,0 | 132,0 mm | 39,0 | 93,0 | 200 |
| K- 07 25 14 36 | G 1/4 | 1.5 - 9 bar | 500 | 138,0 | 132,0 mm | 39,0 | 93,0 | 200 |

Accessories

| | |
|------------------------------------|--|
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-ERSATZMEMBRANE | Replacement diaphragm |
| K-ADAPTERPLATTEN HANSA | Adapter plate HANSA |
| K-FILTERELEMENT | Filter element |
| K-ERSATZBEHÄLTER G UND G-MINI POLY | Spare tanks »G« Series and »G-minik« Series Polycarbonat |
| K-VERBINDUNGSELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |