


# K-FI PC-BEHÄLTER V ABLV HW G

Filters with polycarbonate bowl, bowl guard and »HW« mounting bracket, fully-automatic drain valve

**HANSA FLEX**

## Properties

<b>Input pressure</b>	Max. 10 bar
<b>Media temperature</b>	max. 70 °C
<b>Ambient temperature</b>	Max. 70 °C
<b>Working pressure</b>	1.5 - 9 bar
<b>Pore size in filter element</b>	5 µm
<b>Sealant</b>	NBR
<b>Housing</b>	Die-cast aluminium
<b>Drain valve</b>	Semi- or fully-automatic
<b>Flow rate measurement</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
<b>More information</b>	User manual on request

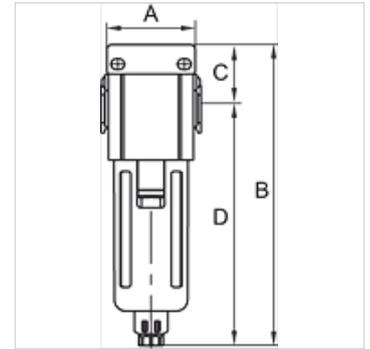

## Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	Size
K- 07 25 06 36	G 1/4	1550	51,0	164.0 mm	21,0	143,0	1
K- 07 25 06 38	G 3/8	1800	51,0	164.0 mm	21,0	143,0	1
K- 07 25 06 40	G 1/2	1800	51,0	164.0 mm	21,0	143,0	1
K- 07 25 06 42	G 3/8	4900	68,0	191.5 mm	25,0	166,5	2
K- 07 25 06 44	G 1/2	4900	68,0	191.5 mm	25,0	166,5	2

## Accessories

K-ERSATZBEHÄLTER G UND G-MINI POLY	Spare tanks »G« Series and »G-mini« Series Polycarbonat
K-SCHUTZKORB G	Protective cage
K-FILTERELEMENT	Filter element
K-HALTERBAUSATZ	Holder
K-VERBINDUNGSELEMENTE	Connecting sets
K-WANDHALTER	Wall bracket