


# K-ZFL ABSP-KLAPPEN

Butterfly valves

**HANSA FLEX**

## Properties

|                              |  |
|------------------------------|--|
| <b>Operating pressure</b>    | Max. 16 bar  |
| <b>Operating temperature</b> | -15 °C to +120 °C  |
| <b>Media</b>                 | Water / steam, salt water, salt water, ester, ketone, alkali, caustic soda, sodium hydroxide. Not recommended for hydrocarbons |
| <b>Temp. range</b>           | -20 °C to +120 °C  |
| <b>Housing</b>               | Grey cast iron GG25 epoxy resin coated, RAL 5015   |
| <b>Seal</b>                  | EPDM   |
| <b>Shaft</b>                 | SS416  |
| <b>Shaft seal</b>            | EPDM   |
| <b>Hand lever</b>            | GG25 epoxy resin coated  |

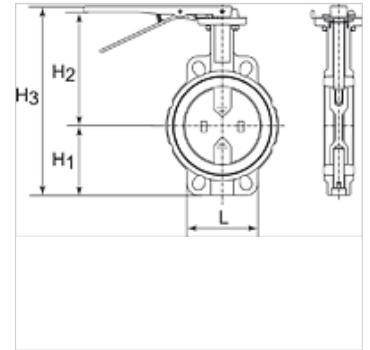

## Note

Further information on request

| Item           |                             |     |        |         |         |         |        |
|----------------|-----------------------------|-----|--------|---------|---------|---------|--------|
| Identification | Washer                      | DN  | B (mm) | H1 (mm) | H2 (mm) | H3 (mm) | L (mm) |
| K- 07 30 03 45 | Stainless Steel CF8M/1.4404 | 40  | 38,0   | 68,0    | 94,0    | 198,0   | 94,0   |
| K- 07 30 03 46 | Stainless Steel CF8M/1.4404 | 50  | 47,0   | 71,0    | 143,0   | 236,0   | 100,0  |
| K- 07 30 03 47 | Stainless Steel CF8M/1.4404 | 65  | 49,0   | 78,0    | 155,0   | 255,0   | 115,0  |
| K- 07 30 03 48 | Stainless Steel CF8M/1.4404 | 80  | 47,0   | 89,0    | 162,0   | 273,0   | 127,0  |
| K- 07 30 03 49 | Stainless Steel CF8M/1.4404 | 100 | 56,0   | 102,0   | 178,0   | 302,0   | 163,0  |
| K- 07 30 03 50 | Stainless Steel CF8M/1.4404 | 125 | 59,0   | 123,0   | 191,0   | 336,0   | 190,0  |
| K- 07 30 03 51 | Stainless Steel CF8M/1.4404 | 150 | 59,0   | 138,0   | 205,0   | 365,0   | 216,0  |