
K-RD STUECKE PP

Reducers

Properties

Working pressure	on request
Operating temperature	Max. +20 °C
Material	Polypropylene (PP)
Sealant	NBR



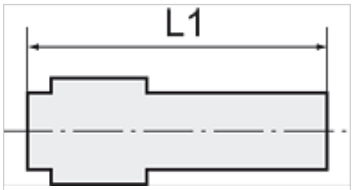

Note

Further information on request

Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Item

Identification	for external hose Ø	L1 (mm)	Nozzle (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.