

# K-RD STUECKE PP

Reducers

**HANSA FLEX**


## Properties

**Working pressure** on request

**Operating temperature** Max. +20 °C

**Material** Polypropylene (PP)

**Sealant** NBR

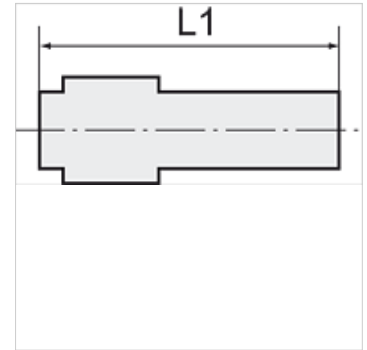

## Note

Further information on request

## Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Item

Identification	for external hose Ø	L1 (mm)	Nozzle (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32