

K-DRV 1

Unidirectional flow control valves

Properties


Operating pressure Max. 10 bar

Operating temperature Max. 70 °C

Sealant NBR

Housing Aluminium

Internal parts Aluminium/Brass

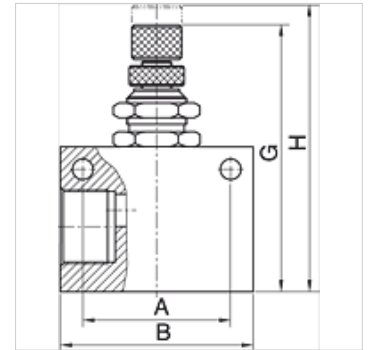

Note

Further information on request

Item

| Identification | Thread | A (mm) | B (mm) | G (mm) | H (mm) |
|----------------|--------|-----------|-----------|-----------|-----------|
| K- 07 30 12 32 | G 1/8 | 22,0 | 32,0 | 46,90 | 52,3 |
| K- 07 30 12 33 | G 1/4 | 26,0 | 36,0 | 50,80 | 56,3 |
| K- 07 30 12 34 | G 3/8 | 35,0 | 50,0 | 65,00 | 74,0 |
| K- 07 30 12 35 | G 1/2 | 35,0 | 50,0 | 65,00 | 74,0 |