
K-DRV 1

Unidirectional flow control valves

Properties

Operating pressure	Max. 10 bar
Operating temperature	Max. 70 °C
Sealant	NBR
Housing	Aluminium
Internal parts	Aluminium/Brass



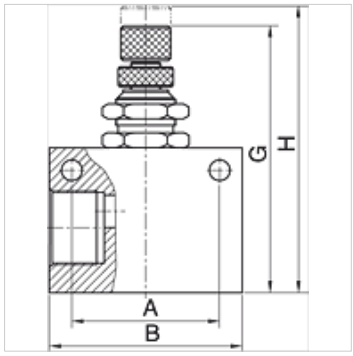

Note

Further information on request

Item

Identification	Thread	A (mm)	B (mm)	G (mm)	H (mm)
K- 07 30 12 32	G 1/8	22,0	32,0	46,90	52,3
K- 07 30 12 33	G 1/4	26,0	36,0	50,80	56,3
K- 07 30 12 34	G 3/8	35,0	50,0	65,00	74,0
K- 07 30 12 35	G 1/2	35,0	50,0	65,00	74,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.