


K-WV 3/2 MECHA ROLLENHEBEL M3

3/2-way valve, mechanically operated, with roller lever, NC

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Operating pressure | 0 - 10 bar |
| Temp. range | -20 °C to +70 °C |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| Valve body | Aluminium alloy |

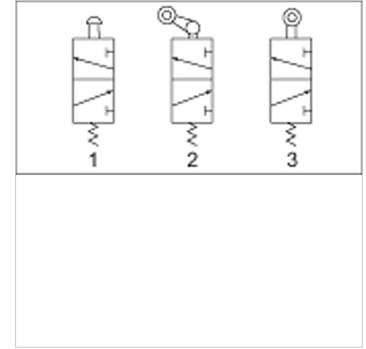

Note

Further information on request

Item

| Identification | Connection | Vent port | Flow rate (L/min) | circuit diagram number |
|----------------|------------|-----------|-------------------|------------------------|
| K- 07 15 01 69 | G 1/8 | G 1/8 | 450 | 3 |
| K- 07 15 01 70 | G 1/4 | G 1/4 | 550 | 3 |