K-WV 3/2 MECHA ROLLENHEB RUECKL M3


3/2-way valve, mechanically operated, with free-return roller lever, NC

HANSA FLEX

Properties

Operating pressure	0 - 10 bar
Temp. range	-20 °C to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Valve body	Aluminium alloy



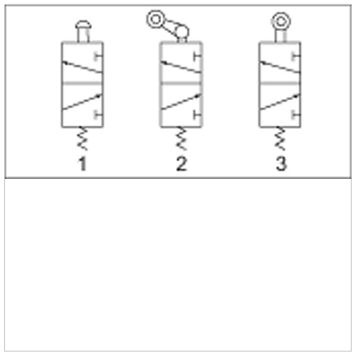

Note

Further information on request

Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number
K- 07 15 01 71	G 1/8	G 1/8	450	2
K- 07 15 01 72	G 1/4	G 1/4	550	2

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.