


# K-WV 3/2 MECHA ROLLENHEB RUECKKL M3

3/2-way valve, mechanically operated, with free-return roller lever, NC

**HANSA FLEX**

## Properties

<b>Operating pressure</b>	0 - 10 bar
<b>Temp. range</b>	-20 °C to +70 °C
<b>Flow rate measurement</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
<b>Valve body</b>	Aluminium alloy

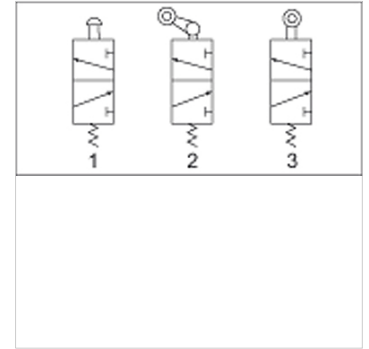

## Note

Further information on request

## Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number
K- 07 15 01 71	G 1/8	G 1/8	450	2
K- 07 15 01 72	G 1/4	G 1/4	550	2