# K-DRG MANO HALTEWINKEL G-MINI


3/2-way shut-off valve

HANSA FLEX

## Properties

| | |
|---|---|
| **Input pressure** | Max. 10 bar |
| **Media temperature** | max. 70 °C |
| **Ambient temperature** | Max. 70 °C |
| **Sealant** | NBR |
| **Spring bonnet** | POM |
| **Housing** | Die-cast aluminium |
| **Flow rate measurement** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| **More information** | User manual on request |



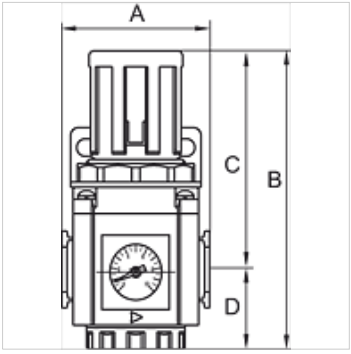


## Item

| Identification | Thread | Control range | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | Size |
|---|---|---|---|---|---|---|---|---|
| **K- 07 25 05 19** | G 1/8 | 0.5 - 9 bar | 1200 | 38,0 | 89,0 mm | 63,5 | 25,5 | 200 |
| **K- 07 25 05 20** | G 1/4 | 0.5 - 9 bar | 1200 | 38,0 | 89,0 mm | 63,5 | 25,5 | 200 |

## Accessories

| | |
|---|---|
| **K-VERSCHLEI-SATZ** | Set of wearing parts |
| **K-ERSATZMEMBRANE** | Replacement diaphragm |
| **K-ADAPTERPLATTEN HANSA** | Adapter plate HANSA |
| **K-HALTERBAUSATZ** | Holder |
| **K-VERBINDUNGELEMENTE** | Connecting sets |
| **K-WANDHALTER** | Wall bracket |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*