



# K-STECKVERSCHR SK MINI

Male connectors, male thread with outer hex, mini

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 10 bar, vacuum
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air
<b>Standard</b>	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
<b>Temp. range</b>	0 °C to +60 °C
<b>Sealing surface</b>	O-ring (NBR)
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

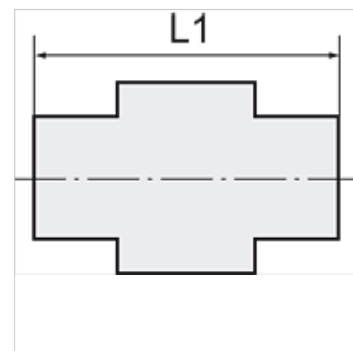

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item				
Identification	Thread	for external hose Ø	L1 (mm)	AF
K- 07 40 23 16	M 3	3 mm	15,0	8 mm
K- 07 40 23 17	M 3	4 mm	17,5	8 mm
K- 07 40 23 18	M 5	3 mm	16,0	8 mm
K- 07 40 23 19	M 5	4 mm	18,5	8 mm
K- 07 40 23 20	M 5	6 mm	18,0	10 mm
K- 07 40 23 21	M 6	3 mm	15,0	10 mm
K- 07 40 23 22	M 6	4 mm	19,0	10 mm
K- 07 40 23 23	M 6	6 mm	18,5	10 mm
K- 07 40 23 24	G 1/8	4 mm	15,2	14 mm
K- 07 40 23 25	G 1/8	6 mm	17,2	13 mm
K- 07 40 23 26	R 1/8	4 mm	16,0	10 mm
K- 07 40 23 27	R 1/8	6 mm	18,5	10 mm