


K-W TUE VB POM

Union elbows



| Properties | |
|-----------------------|---|
| Working pressure | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| Operating temperature | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| Material | Acetalpolymerisat (POM) |
| Sealant | NBR |

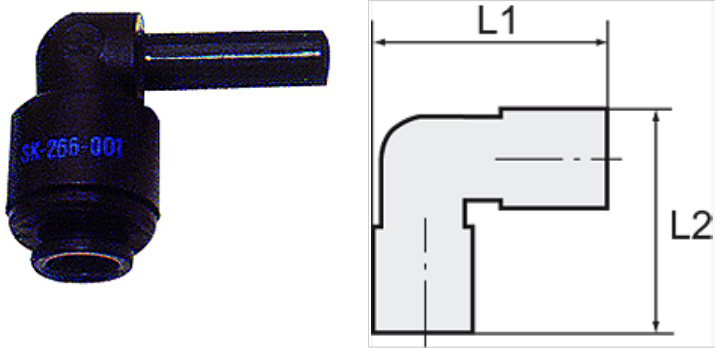

Note
Further information on request

Description
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

| Item | | | | |
|----------------|---------------------|------------|------------|----------------|
| Identification | for external hose Ø | L1 (mm) | L2 (mm) | Nozzle (mm) |
| K- 07 40 29 02 | 4 mm | 22,8 | 27,3 | 4 |
| K- 07 40 29 03 | 5 mm | 22,8 | 27,3 | 5 |
| K- 07 40 29 04 | 6 mm | 25,9 | 30,8 | 6 |
| K- 07 40 29 05 | 8 mm | 28,4 | 34,4 | 8 |
| K- 07 40 29 06 | 10 mm | 32,7 | 38,8 | 10 |
| K- 07 40 29 07 | 12 mm | 42,3 | 48,5 | 12 |
| K- 07 40 29 08 | 15 mm | 50,7 | 57,9 | 15 |
| K- 07 40 29 09 | 18 mm | 54,2 | 62,1 | 18 |