


K-STECKVERSCHR IG SK MINI

Male connectors, female thread with outer hex, mini



Properties	
Working pressure	Max. 10 bar, vacuum
Application	Air, vacuum
Recommended hoses	PU or PA (nylon)
Media	Compressed air
Standard	M thread acc. to DIN 13-1, with O-Ring
Temp. range	0 °C to +60 °C
Sealing surface	O-ring (NBR)
Material	Plastic, Nickel plated brass
Contact pressure ring	Plastic

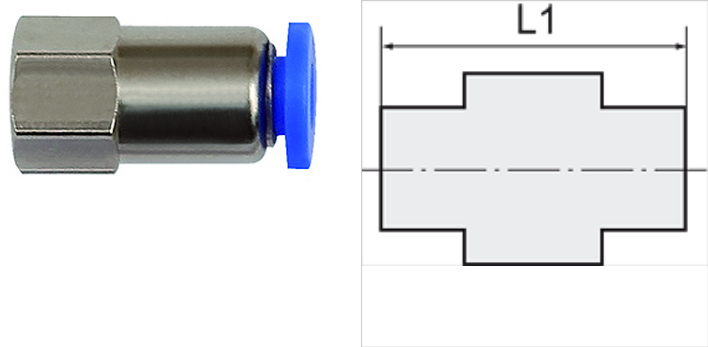

Note
Further information on request

Description
Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item				
Identification	Thread	for external hose Ø	L1 (mm)	AF
K- 07 40 49 99	M 3	3 mm	16,7	8 mm
K- 07 40 50 00	M 3	4 mm	18,0	8 mm
K- 07 40 50 01	M 5	3 mm	16,2	8 mm
K- 07 40 50 02	M 5	4 mm	18,0	8 mm