


K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

HANSA FLEX

Properties

Media	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Working pressure	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Temp. range	-20 °C to +80 °C
Piston rod	Hardened steel, thick-chromed
Piston	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
Sealant	NBR
Cylinder pipe	Aluminium

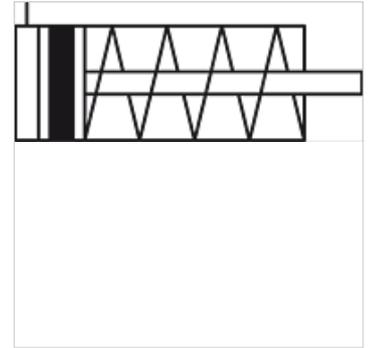

Description

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100
Series "ASQ", single-acting, Ø 12 - 63

Additional information

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

Item	Identification	Ø piston	Stroke (mm)	Type	Ø piston rod (mm)	thread internal piston rod
K- 07 15 13 33		12 mm	5	4	6	M 3 x 0.5
K- 07 15 13 34		12 mm	10	4	6	M 3 x 0.5
K- 07 15 13 35		12 mm	15	4	6	M 3 x 0.5
K- 07 15 13 36		12 mm	20	4	6	M 3 x 0.5
K- 07 15 13 37		16 mm	5	4	8	M 4 x 0.7
K- 07 15 13 38		16 mm	10	4	8	M 4 x 0.7
K- 07 15 13 39		16 mm	15	4	8	M 4 x 0.7
K- 07 15 13 40		16 mm	20	4	8	M 4 x 0.7
K- 07 15 13 41		20 mm	5	5	10	M 5 x 0.8
K- 07 15 13 42		20 mm	10	5	10	M 5 x 0.8
K- 07 15 13 43		20 mm	15	5	10	M 5 x 0.8
K- 07 15 13 44		20 mm	20	5	10	M 5 x 0.8
K- 07 15 13 45		20 mm	25	5	10	M 5 x 0.8
K- 07 15 13 46		20 mm	30	5	10	M 5 x 0.8
K- 07 15 13 47		25 mm	5	5	12	M 6 x 1
K- 07 15 13 48		25 mm	10	5	12	M 6 x 1
K- 07 15 13 49		25 mm	15	5	12	M 6 x 1
K- 07 15 13 50		25 mm	20	5	12	M 6 x 1
K- 07 15 13 51		25 mm	25	5	12	M 6 x 1
K- 07 15 13 52		25 mm	30	5	12	M 6 x 1
K- 07 15 13 53		32 mm	5	6	16	M 8 x 1.25
K- 07 15 13 54		32 mm	10	6	16	M 8 x 1.25
K- 07 15 13 55		32 mm	15	6	16	M 8 x 1.25
K- 07 15 13 56		32 mm	20	6	16	M 8 x 1.25
K- 07 15 13 57		32 mm	25	6	16	M 8 x 1.25
K- 07 15 13 58		32 mm	30	6	16	M 8 x 1.25
K- 07 15 13 59		40 mm	5	6	16	M 8 x 1.25
K- 07 15 13 60		40 mm	10	6	16	M 8 x 1.25
K- 07 15 13 61		40 mm	15	6	16	M 8 x 1.25
K- 07 15 13 62		40 mm	20	6	16	M 8 x 1.25
K- 07 15 13 63		40 mm	25	6	16	M 8 x 1.25
K- 07 15 13 64		40 mm	30	6	16	M 8 x 1.25
K- 07 15 13 65		50 mm	5	6	20	M 10 x 1.5
K- 07 15 13 66		50 mm	10	6	20	M 10 x 1.5
K- 07 15 13 67		50 mm	15	6	20	M 10 x 1.5
K- 07 15 13 68		50 mm	20	6	20	M 10 x 1.5
K- 07 15 13 69		50 mm	25	6	20	M 10 x 1.5



Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

05.06.2026

HANSA-FLEX AG

www.hansa-flex.com

1

K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series



Item					
Identification	Ø piston	Stroke (mm)	Type	Ø piston rod (mm)	thread internal piston rod
K- 07 15 13 70	50 mm	30	6	20	M 10 x 1.5
K- 07 15 13 71	63 mm	5	6	20	M 10 x 1.5
K- 07 15 13 72	63 mm	10	6	20	M 10 x 1.5
K- 07 15 13 73	63 mm	15	6	20	M 10 x 1.5
K- 07 15 13 74	63 mm	20	6	20	M 10 x 1.5
K- 07 15 13 75	63 mm	25	6	20	M 10 x 1.5
K- 07 15 13 76	63 mm	30	6	20	M 10 x 1.5

Accessories

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPFE TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug