



# K-S-BKR FEDERRUECKSTELLUNG

Safety ball valve with spring return

**HANSA FLEX**

## Properties

|                       |                           |
|-----------------------|---------------------------|
| Operating temperature | -20 °C to +170 °C         |
| Thread description    | Rp thread acc. to ISO 7-1 |
| Spring                | Stainless steel 1.4301    |
| Housing               | Nickel-plated brass       |
| Hand lever            | Steel - PVC coated        |
| Ball                  | hardchrome-plated brass   |
| Ball seals            | PTFE                      |
| Stem seal             | FKM                       |

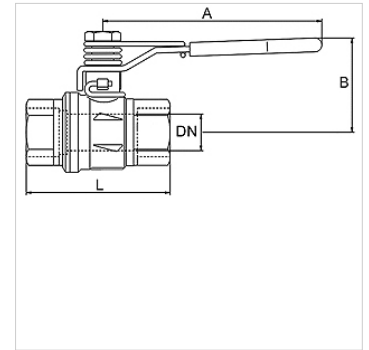

## Note

Further information on request

## Description

2/2-way safety ball valves, two parts, made of nickel-plated brass with spring return. Applications: Compressed air, water, oils, fuel oil, fuels, inert gases. Silicone-free. The ball valve is closed in the normal position and opens against spring force.

## Item

| Identification | DN | Thread   | PN (bar) | A (mm) | B (mm) | L (mm) |
|----------------|----|----------|----------|--------|--------|--------|
| K- 07 30 30 40 | 8  | Rp 1/4   | 65       | 100,0  | 40,0   | 50,0   |
| K- 07 30 30 43 | 10 | Rp 3/8   | 65       | 100,0  | 40,0   | 60,0   |
| K- 07 30 30 39 | 15 | Rp 1/2   | 65       | 100,0  | 43,0   | 75,0   |
| K- 07 30 30 42 | 20 | Rp 3/4   | 40       | 120,0  | 51,0   | 80,0   |
| K- 07 30 30 36 | 25 | Rp 1     | 40       | 120,0  | 55,0   | 90,0   |
| K- 07 30 30 38 | 32 | Rp 1 1/4 | 40       | 158,0  | 75,0   | 110,0  |
| K- 07 30 30 37 | 40 | Rp 1 1/2 | 40       | 158,0  | 81,0   | 120,0  |
| K- 07 30 30 41 | 50 | Rp 2     | 40       | 158,0  | 88,0   | 140,0  |