


K-W90 SCHLAUCH VB PFA

Elbow hose connectors - Perfluoroalkoxy alkane (PFA)

HANSA**FLEX**

Properties

| | |
|-----------------------|--|
| Operating pressure | Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 170 °C) |
| Operating temperature | Max. 200 °C |
| Material | Perfluoroalkoxy alkane (PFA) |

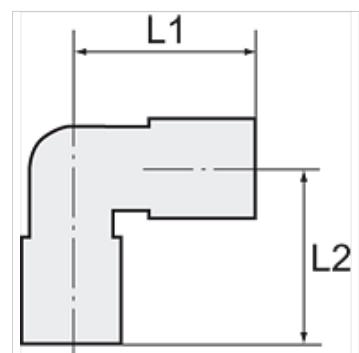

Note

Further information on request

Description

Perfluoroalkoxy alkane (PFA): A fluoroplastic (PTFE) with the same chemical resistance as PTFE but much stronger and suitable for temperatures up to 200°C.

Item

| Identification | for hose | L1 (mm) | L2 (mm) |
|----------------|--------------|------------|------------|
| K-07 40 41 58 | 4 mm / 6 mm | 25,0 | 25,0 |
| K-07 40 41 60 | 6 mm / 8 mm | 30,0 | 30,0 |
| K-07 40 41 62 | 8 mm / 10 mm | 36,0 | 36,0 |