


K-WTEH 3-TLG MET SICHT WAND V G

Service units, 3-piece with metal bowl, sight glass and joiner for wall mounting, fully-automatic drain valve

HANSA FLEX

Properties

| | |
|------------------------------------|--|
| Input pressure | Max. 10 bar |
| Media temperature | max. 70 °C |
| Ambient temperature | Max. 70 °C |
| Pore size in filter element | 5 µm |
| Sealant | NBR |
| Spring bonnet | POM |
| Housing | Die-cast aluminium |
| Dropper | Brass/POM |
| Drain valve | Semi- or fully-automatic |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| More information | User manual on request |

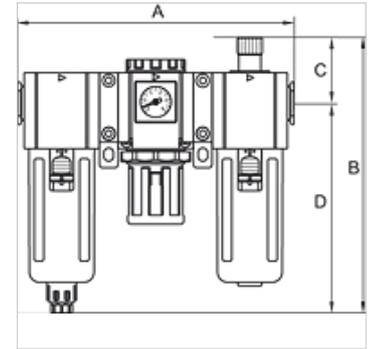

Item

| Identification | Thread | Control range | Flow rate (L/min) | A (mm) | B (mm) | C (mm) | D (mm) | Size |
|----------------|--------|---------------|-------------------|--------|----------|--------|--------|------|
| K- 07 25 14 32 | G 3/4 | 1.5 - 9 bar | 3750 | 295,0 | 280.5 mm | 61,5 | 219,0 | 600 |
| K- 07 25 14 34 | G 1 | 1.5 - 9 bar | 3750 | 295,0 | 280.5 mm | 61,5 | 219,0 | 600 |

Accessories

| | |
|-------------------------------------|--|
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-ERSATZMEMBRANE | Replacement diaphragm |
| K-ADAPTERPLATTEN HANSA | Adapter plate HANSA |
| K-FILTERELEMENT | Filter element |
| K-ERSATZBEHAELTER G UND G-MINI POLY | Spare tanks »G« Series and »G-minik« Series Polycarbonat |
| K-VERBINDUNGELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |